



## OMX 39

The OMX 39 model series are low-price and simple analog transmitters with mounting to 35 mm wide DIN rail.

Transmitters have galvanic separation with isolation voltage of 600 V and thus they are suitable as primary isolation for majority of industrial applications.

### OMX 39DC

DC VOLTMETER AND AMMETER

### OMX 39AC

AC VOLTMETER AND AMMETER

### OMX 39PM

PROCESS MONITOR

### OMX 39W

WATTMETR

### OMX 390HM

OHMMETR

### OMX 39RTD

THERMOMETER FOR Pt/Ni

### OMX 39DU

LINEAR POTENTIOMETERS

- ISOLATED TRANSMITTERS TO DIN RAIL
- SIZE OF 113 X 98 MM, WIDTH 22 MM
- POWER SUPPLY 80...250 V AC/DC
- Option  
Excitation • Power supply 10...30 V AC/DC

## OPERATION


The transmitter is designed for simple measurement without further control.

## CALIBRATION

By trimmers accessible from the face of the transmitter we may adjust the range of output signal within the range of  $\pm 10\%$ .

## OPTIONS

**EXCITATION** is suitable for feeding of sensors and transmitters. It is isolated, with continuously adjustable value in the range of 2...24 VDC.

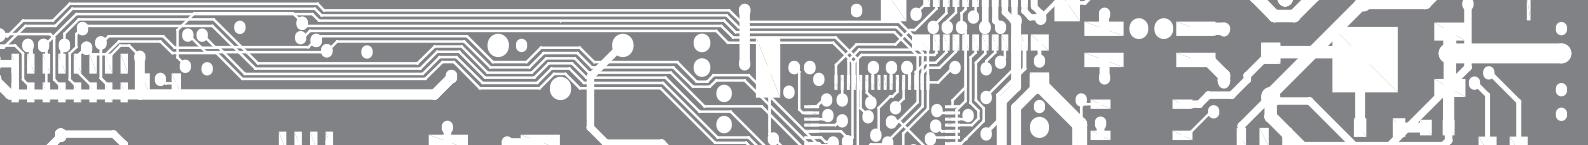

## TECHNICAL DATA

### INSTRUMENT ACCURACY

**TK:** 50 ppm/ $^{\circ}$ C

**Accuracy:**  $\pm 0.1\%$  of range

$\pm 0.2\%$  of range

$\pm 0.3\%$  of range

$\pm 0.5\%$  of range

**Rate:** continuous measurement

**Overload capacity:** 10x [ $t < 30$  ms] - not for  $> 300$  V, 5A; 2x

**Calibration:** at 25 $^{\circ}$ C and 40% r.h.

**RTD, OHM**  
**AC**  
**W**

### ANALOG OUTPUT

**Type:** isolated, fixed setting

**TC:** 50 ppm/ $^{\circ}$ C

**Ref:** response to change of value  $< 1$  ms

response to change of value  $< 1$  s [AC, W, RTD, OHM]

**Voltage:** 0...2 V, 0..5 V, 0...10 V, on request  $\pm 10$  V [minimum load 1 k $\Omega$ ]

**Current:** 0...20 mA, 4...20 mA, on request  $\pm 20$  mA [comp. < 500  $\Omega$ ]

### EXCITATION

**Adjustable:** 5...24 VDC/max. 1.2 W

### POWER SUPPLY

10...30 V AC/DC,  $\pm 10\%$ , max. 5 VA, PF  $\geq 0.4$ ,  $I_{SPP} < 40$  A/1 ms

80...250 V AC/DC,  $\pm 10\%$ , max. 5 VA, PF  $\geq 0.4$ ,  $I_{SPP} < 40$  A/1 ms

**Power supply is protected by a fuse inside the instrument**

### MECHANIC PROPERTIES

**Material:** PA 66, incombustible UL 94 V-I, blue

**Dimensions:** 113 x 98 x 22 mm

**Installation:** to DIN rail 35 mm wide

### OPERATING CONDITIONS

**Connection:** terminal board, section  $< 2.5$  mm $^2$

**Stabilization period:** within 6 minutes after switch-on

**Working temperature:** -20 $^{\circ}$ ...60 $^{\circ}$ C

**Storage temperature:** -20 $^{\circ}$ ...85 $^{\circ}$ C

**Cover:** IP20

**El. safety:** EN 61010-1, A2

**Dielectric strength:** 4 kVAC after 1 min between supply and input

4 kVAC after 1 min between supply and analog output

2.5 kVAC after 1 min between input and analog output

**Insulation resistance:** for pollution degree II, measuring cat. III.

power supply  $> 600$  V [Pi], 300 V [Di]

input, output, Exc.  $> 500$  V [Pi], 250 V [Di]

**EMC:** EN 61326-1


**Seismic capacity:** IEC 980: 1993, par. 6

Pi - Primary insulation, Di - Double insulation

## MEASURING RANGES

	<b>DC</b>	<b>AC</b>	<b>W - U</b>	<b>W - I</b>	<b>PM</b>	<b>OHM</b>	<b>RTD</b>	<b>DU</b>
w/o		40...2 500 Hz				0...100 k $\Omega$	-50 $^{\circ}$ ...850 $^{\circ}$ C	0...100 k $\Omega$
A	60 mV...450 V	60 mV...450 V			0...5 mA		Pt 100	
B	5 mA...5 A	5 mA...5 A			0...20 mA		Pt 500	
C					4...20 mA		Pt 1 000	
D					0...2 V		Ni 1 000	
E					0...5 V			
F					0...10 V			
H					0...60 mV			
J					0...150 mV			
K					0...300 mV			
N					0...1 A			
P					0...5 A			
R			0...120 V					
S			0...150 V					
T			0...250 V					
U			0...450 V					
Z	on request	on request	on request	on request	on request			

## CONNECTION

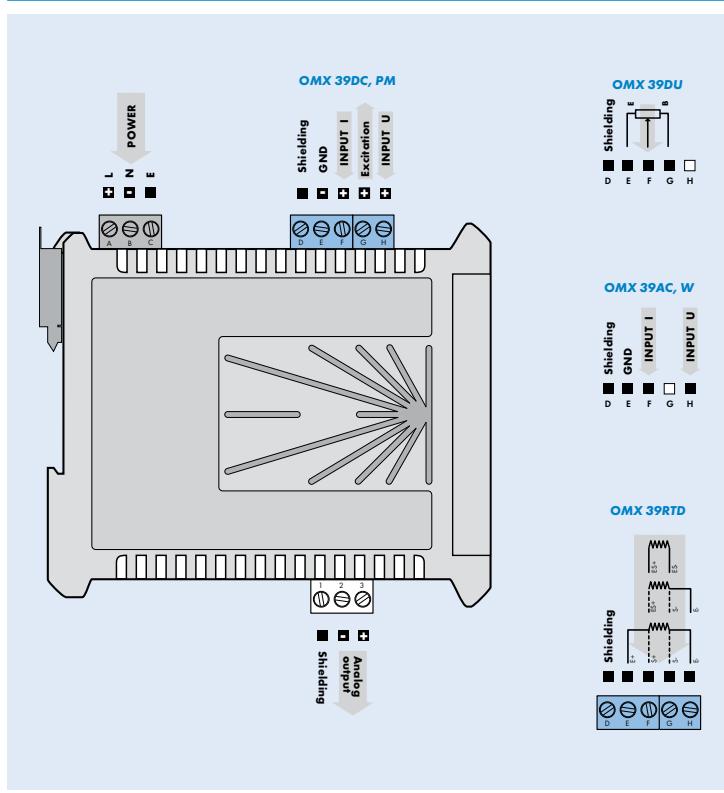

## ORDER CODE

### OMX 39

Type

					-			
--	--	--	--	--	---	--	--	--

D	C	•	•	•				
A	C	•	•	•				
P	M	•	•	•				
W		•	•	•				
O	H	•	•	•				
R	T	•	•	•				
D	U	•	•	•				

Order code shall not include blank spaces!

**Power supply**

0

1

2

3

4

5

6

7

8

10...30 V AC/DC

80...250 V AC/DC

Excitation

no

yes

2-wire

1

3-wire

2

4-wire

3

Analog output

1

2

3

4

5

6

7

8

Please, state the input range (from the entire range stated) in your order!

Default execution is shown in bold