



## OMM 335PAS



OMM 335PAS is a 4-digit passive analog loop display 4...20 mA.

The instrument is based on a microcontroller with a very low power consumption and an A/D converter, which ensures good accuracy and easy operation of the instrument.

The 22 mm cross-section of the circular instrument body allows its convenient mounting into mosaic and signalling panels.

### PASSIVE LOOP DISPLAY 4...20 mA

- 4-DIGIT programmable projection
- Input: 4...20 mA
- Linearization
- Size of DIN 51,5 x 29,5 mm
- Power supply from the loop

**OMM 335PAS**  
PASSIVE LOOP DISPLAY 4...20 mA

### OPERATION

The instrument is set and controlled by two buttons located on its the body.  
Standard equipment is the OM Link USB interface, which, when using the control program, allows you to edit and archive all device settings and to update firmware.  
All settings are stored in FLASH memory (they hold even after the power is turned off).

### STANDARD FUNCTIONS

#### PROGRAMMABLE PROJECTION

Setting: manual, optional projection on the display may be set in menu for both limit values of the input signal, e.g. input 4...20mA > 0...250,0  
Projection: -999...9999

#### FUNCTIONS

Linearization: non-linear signals can be linearized by the means of a linearization table (up to 50 points)

## TECHNICAL DATA

### INPUT

Number of inputs	1
PAS Range	fixed 4...20 mA < 5,5 V

### PROJECTION

Display: -999...9999, single color LED, 7-segment  
Digit height: 14 mm  
Display color: red or green  
Decimal point: adjustable - in menu  
Brightness: fixed

### INSTRUMENT ACCURACY

TC: 50 ppm/°C  
Accuracy: ±0,15 % of range + 1 digit  
(for projection -999...1999)  
Rate: 0,1...100 measurement/s  
Overload capacity: 2x  
Linearization: linear interpolation in 50 points (only via OM Link) (only via OM Link)  
OM Link: Company communication interface for operation, setting and update of instruments (microUSB)  
Watch-dog: reset after 500 ms  
Calibration: at 25°C and 40 % r.h.

### COMPARATORS

Type: digital, menu adjustable  
Hysteresis mode: switching limit, hysteresis band (Lim and ±1/2 Hys.) and time (±99,9 s) determining the switching delay  
Output: 2x Power MOSFET, (30 VDC/0,5 A)

### POWER SUPPLY

from current loop 4...20 mA, voltage drop < 5,5 V

### MECHANIC PROPERTIES


Material: PA66, incombustible UL 94 V-0  
Dimensions: 51,5 x 29,5 x 66 mm (w x h x d)  
Panel cutout: Ø 22,5 mm

### OPERATING CONDITIONS

Connection: connector terminal blocks, section < 1,3 mm<sup>2</sup>  
Stabilization period: within 5 minutes after switch-on  
Working temperature: -20°...60°C  
Storage temperature: -20°...85°C  
Protection: IP65 (front panel only)  
El. safety: EN 61010-1, A2  
EMC: EN 61326-1

PI - Primary insulation, DI - Double insulation

## CONNECTION

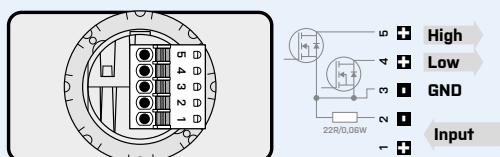

## ORDER CODE

**OMM 335PAS**

-  -

Display color

red  
green

**1**

**2**

Specification      customized version, do not fill in

**00**

Basic configuration of the instrument is indicated in bold.