
OMX 311UNI



DIGITAL ISOLATED CONVERTER



OMX 311UNI



- Multifunction input (DC, PM, RTD, T/C, DU)
- Analogue output, passive/active
- Quick configuration by DIP switch
- PC configurable via USB port
- Excitation 24 VDC
- Galvanic isolation 2.5 kVAC
- Simple instalation to DIN rail
- Power supply 10...30 VDC, 24 VAC

The OMX 300 model series are digital DIN rail mounted signal converters housed in an enclosure only 17.5 mm wide.

The OMX 311UNI type is a galvanic isolated single-channel universal signal converter. It can be configured for 10 different input variants. Setting of both the input and output ranges can be done conveniently by a DIP switch located on the side of the housing or from a PC via the OM Link SW.

This device is based on a microprocessor with a 24-bit $\Delta\Sigma$ A/D converter, which guarantees high accuracy and excellent stability.

OPERATION

The device can be configured either by DIP switches located on the side of the housing or by PC using the OM Link SW. The same SW can be used to edit and archive all device settings, as well as to perform firmware updates and customer calibration. A standard microUSB cable is required for PC to device connection.

Tech-in process can be performed for the measuring range currently selected using the front panel buttons.

All settings are stored in the EEPROM memory (preserved even after power-off)

STANDARD FUNCTIONS*

PROGRAMMABLE INPUT

Selection: of input type and measuring range

Standard setting: any input values can be assigned to Min and Max values of the analog output

Teach-in: any input values can be assigned to Min and Max values of the actual (unknown) input signal

Manual setting: the known Min and Max values of the input signal can be set manually and any analog output values can be assigned to each of them at the same time

ANALOG OUTPUT

Type: isolated, configurable with resolution of 10 000 parts, rate < 3.5 ms Range: 0...10 V, 0...20 mA,4...20 mA

EXCITATION

Range: 24 VDC/35 mA, isolated

FUNCTIONS

Linearization: 100-point conversion of non-linear input signals by interpolation Tare: designed to reset display upon non-zero input signal Simulation: test mode in which range, value and duration of the step can be set

Math functions: polynomial, inverse polynomial, logarithm, exponential, power, root

DIGITAL FILTERS

Floating average: from 2...30 measurements Exponential average: from 2...100 measurements Arithmetic average: from 2...100 measurements

TECHNICAL DATA

No. of					
No. of inputs		1			
		The range is selectable either by DIP switch or by OM Link free SW from PC			
DC	Range	±60 mV	> 10 MΩ	Input 1	
		±75 mV	> 10 MΩ	Input 1	
		±100 mV	> 10 MΩ	Input 1	
		±150 mV	> 10 MΩ	Input 1	
		±300 mV	> 10 MΩ	Input 1	
		±1000 mV	> 10 MΩ	Input 1	
		±20 V	1 ΜΩ	Input 2	
		±40 V	1ΜΩ	Input 2	
		±100 mA	< 200 mV	Input 3	
PM	Range	±5 mA	< 200 mV	Input 3	
		±20 mA	< 200 mV	Input 3	
		420 mA	< 200 mV	Input 3	
		±2 V	1 ΜΩ	Input 2	
		±5 V	1 ΜΩ	Input 2	
		±10 V	1ΜΩ	Input 2	
ОНМ	Range	0100/300 Ω			
		01/3/10/30/100 kΩ			
		0300 kΩ (only 2- and 4-wire)			
	Connection	2-, 3- or 4-wire, with broken cable/sensor detection			
Pt	Туре	Pt 100/500/1 000, 3 851 ppm/°C		-50°450°C	
		Pt 100, 3 920 ppm/°C		-50°450°C	
		Pt 50, 3 910 ppr	n/°C	-200°1100°C	
		Pt 100, 3 910 pp	om/°C	-200°450°C	
	Connection	2-, 3- or 4-wire, with broken cable/sensor detection			
Ni	Туре	Ni 1 000/10 000	0, 5 000 ppm/°C	-50°250°C	
		Ni 1 000/10 000	0, 6 180 ppm/°C	-200°250°C	
	Connection	2-, 3- or 4-wire,			
		with broken cable/sensor detection			
Cu	Туре	Cu 50/100, 4 26	00 ppm/°C	-50°200°C	
				-200°200°C	
	Connection	2-, 3- or 4-wire,			
,	Connection		ole/sensor detection		
NTC	Connection	with broken cal		-40°125°C	
NTC		with broken call	B ₂₅₈₅ = 3600		
NTC		with broken calc NTC 1 2k2, NTC 2 2k0,	B ₂₅₈₅ = 3600 B ₂₅₈₅ = 3528	-40°125°C -40°125°C	
NTC		With broken calc NTC 1 2k2, NTC 2 2k0, NTC 3 10k, NTC 4 10k,	B ₂₅₈₅ = 3600 B ₂₅₈₅ = 3528 B ₂₅₈₅ = 3435 B ₂₅₈₅ = 3977	-40°125°C -40°125°C -40°125°C	
NTC		With broken calc NTC 1 2k2, NTC 2 2k0, NTC 3 10k, NTC 4 10k, NTC 5 12k, I	B ₂₅₈₅ = 3600 B ₂₅₈₅ = 3528 B ₂₅₈₅ = 3435 B ₂₅₈₅ = 3977 B ₂₅₈₅ = 3740	-40°125°C -40°125°C -40°125°C -40°125°C	
NTC		With broken calc NTC 1 2k2, NTC 2 2k0, NTC 3 10k, NTC 4 10k, NTC 5 12k, I	B ₂₅₈₅ = 3600 B ₂₅₈₅ = 3528 B ₂₅₈₅ = 3435 B ₂₅₈₅ = 3977	-40°125°C -40°125°C -40°125°C -40°125°C	
NTC		With broken calc NTC 1 2k2, NTC 2 2k0, NTC 3 10k, NTC 4 10k, NTC 5 12k, I	B ₂₅₈₅ = 3600 B ₂₅₈₅ = 3528 B ₂₅₈₅ = 3435 B ₂₅₈₅ = 3977 B ₂₅₈₅ = 3740	-40°125°C -40°125°C -40°125°C -40°125°C	
NTC	Туре	with broken calc NTC 1 2k2, NTC 2 2k0, NTC 3 10k, NTC 4 10k, NTC 5 12k, k NTC 6 20k, 2-, 3- or 4-wire,	B ₂₅₈₅ = 3600 B ₂₅₈₅ = 3528 B ₂₅₈₅ = 3435 B ₂₅₈₅ = 3977 B ₂₅₈₅ = 3740	-40°125°C -40°125°C -40°125°C -40°125°C	
NTC	Туре	with broken calc NTC 1 2k2, NTC 2 2k0, NTC 3 10k, NTC 4 10k, NTC 5 12k, k NTC 6 20k, 2-, 3- or 4-wire,	B ₂₆₈₅ = 3600 B ₂₆₈₅ = 3528 B ₂₆₈₆ = 3435 2 ₅₆₈₅ = 3977 3 ₂₅₈₅ = 3740 B ₂₅₈₅ = 4263	-40°125°C -40°125°C -40°125°C -40°125°C -40°125°C	
	Type	with broken calc NTC 1 2k2, NTC 2 2k0, NTC 3 10k, NTC 4 10k, NTC 5 12k, I NTC 6 20k, 2-, 3- or 4-wire, with broken calc	B ₂₆₈₅ = 3600 B ₂₆₈₅ = 3528 B ₂₆₈₆ = 3435 2 ₅₆₈₅ = 3977 3 ₂₅₈₅ = 3740 B ₂₅₈₅ = 4263	-40°125°C -40°125°C -40°125°C -40°125°C -40°125°C -40°125°C	

T/C	Туре	J (Fe-CuNi)	-200°900°C	
		K (NiCr-Ni)	-200°1300°C	
		T (Cu-CuNi)	-200°400°C	
		E (NiCr-CuNi)	-200°690°C	
		B (PtRh30-PtRh6)	300°1820°C	
		S (PtRh10-Pt)	-50°1760°C	
		R (Pt13Rh-Pt)	-50°1740°C	
		N (Omegalloy)	-200°1300°C	
		L (Fe-CuNi)	-200°900°C	
		XK (Chromel-Copel)	-200°800°C	
		with broken cable/sensor detection		
DU	Power	1,65 VDC/3 mA,		
		potentiometer resistance > 500 Ω		

INSTRUMENT ACCURACY

TC: 50 ppm/°C Accuracy: ±0,1% of range + 1 digit

Accuracy: ±0,1% of range +1 digit Rate: 1...100 measurement/s Overload capacity: 2x.10x (t < 30 ms) Compensation of conduct: max. 30 Ω (RTD) Measurement accuracy CJC: ±1.5°C (T/C)

Functions: Teach-in, Tare, Math functions, Simulation
Digital filters: exponential/floating/arithmetic average, rouding

Math functions: polynomial/inverse polynomial/logarithm/exponential/power/root

Linearization: linear interpolation in 100 points (only via OM Link)

OM Link: company communication interface for operation, setting and update of instruments, microUSB

Watch-dog: reset after 500 ms Calibration: at 25°C and 40 % r.h.

ANALOG OUTPUT

No. of outputs: 1

Type: isolated, configurable with a resolution of 10 000 parts, type and range

are selectable in the menu Non-linearity: 0.1% of range

TC: 15 ppm/°C

Rate: response to change of value < 3.5 ms

Ranges: 0...10 V, 10...0 V, resistive load < 2.6 k Ω

0...20 mA/20...0, 4...20/20...4 mA (active/passive), compen. < 600 Ω /12 V

EXCITATION

Fixed: 24 VDC/35 mA. isolated

POWER SUPPLY

Range: 10...30 V AC/DC, \pm 10 %, PF \geq 0,4, I $_{\rm STP}$ < 40 A/1 ms, isolated

Consumption: < 2.5 W/2.4 VA

Power supply is protected by a fuse inside the instrument

MECHANICAL PROPERTIES

Material: PA 66, incombustible UL 94 V-I, blue Dimensions: 17.5 x 99 x 114.5 mm (w x h x d) Installation: on DIN rail, width 35 mm

OPERATING CONDITIONS

Connection: connector terminal blocks, section < 2.5 mm² Stabilization period: within 5 minutes after switch-on

Working temperature: -20°...60°C Storage temperature: -20°...80°C Protection: IP20

El. safety: EN 61010-1, A2

Dielectric strength: 2.5 kVAC for 1 min test between supply and input 2.5 kVAC for 1 min. between signal input and outputs

Insulation resistance: for pollution degree II, measuring cat. III power supply > 300 V (PI), 255 V (DI)


input/output > 300 V (PI)

EMC: EN 61326-1

Seismic qualification: IEC/IEEE 60980-344 Edition 1.0, 2020, par. 6, 9 Mechanical resistance: EN 60068-2-6 ed. 2:2008

PI - Primary insulation, DI - Double insulation

CONNECTION

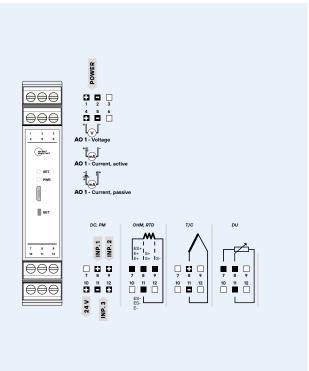

ORDER CODE

OMX 311UNI



customized version, do not fill in