



OMX 39DC




- Input 0...10 mV ~ 450 V
0...5 mA ~ 5 A
- Output 0...5 mA, 0...20 mA, 4...20 mA, ±20 mA
0...2 V, 0...5 V, 0...10 V, ±10 V
- Galvanic separation 3.75 kVAC
- Power supply 10...30 V AC/DC; 80...250 V AC/DC

Option

Excitation

ISOLATED TRANSMITTER DC V-A > U/I



The OMX 39 model series are low-price and simple analog transmitters with mounting on a 35 mm wide DIN rail.

Type OMX 39DC is a transmitter for galvanic separation of DC voltage or current.

The transmitters have galvanic separation with isolation voltage of 600 V and thus they are suitable as primary isolation for majority of industrial applications.

OPERATION

The transmitter is designed for simple measurements without further control.

CALIBRATION

By trimmers accessible from the face of the transmitter you may adjust the range of the output signal within the range of ±10 %.

OPTION

EXCITATION with continuously adjustable value is suitable for feeding sensors and transmitters.

TECHNICAL DATA

INPUT				
No. of inputs		1 The range is fixed		
DC	Range	0...10 mV ~ 10 V	0.5 MΩ	Input U
	0...10 V ~ 450 V	1 MΩ		Input U
	0...5 mA ~ 5 A	< 250 mV		Input I

INSTRUMENT SPECIFICATION

TC	50 ppm/ $^{\circ}$ C
Accuracy	$\pm 0.1\%$ of FS
Rate	continuous measurement
Overload	10x ($t < 30$ ms), 2x not valid for > 250 V and 5 A ranges
Calibration	at 25 $^{\circ}$ C and 40 % rh.

POWER SUPPLY

Range	10...30 V AC/DC, $\pm 10\%$, PF ≥ 0.4 , $I_{\text{SIP}} < 75 \text{ A}/1\text{ms}$, isolated 80...250 V AC/DC, $\pm 10\%$, PF ≥ 0.4 , $I_{\text{SIP}} < 40 \text{ A}/1\text{ms}$, isolated <i>Protection by fuse inside the device.</i>
Consumption	1.24 W/25 °C

ANALOG OUTPUTS

ANALOG OUTPUTS	
No. of outputs	1
Type	isolated, fixed setting
TC	25 ppm/ $^{\circ}$ C
Rate	response to change of value < 1 ms
Ranges	0...2.5 / 10... \pm 10 V, resistive load \geq 1 k Ω 0.5...20 mA / $-$ 20 mA, \pm 20 mA, compensation \leq 600 Ω /2 V

MECHANIC PROPERTIES

Material	PA 66, incombustible UL 94 V-I, blue
Dimensions	22 x 98 x 113 mm (w x h x d)
Installation	on DIN rail, width 35 mm

EXCITATION


EXCITATION

OPERATING CONDITIONS

Connection	connector terminal blocks, section < 2.5 mm ²
Stabilization period	within 5 minutes after switch-on
Working temperat.	-20°...60°C
Storage temperat.	-20°...85°C
Working humidity	< 95 % r.v., non condensing
Protection	IP20
Construction	safety class I
EL. safety	EN 61010-1, A2
Dielectric strength	4 kVAC per 1 min test between supply and input 4 kVAC per 1 min test between supply and analog output 3.75 kVAC per 1 min test between input and analog output
Insulation resist.*	for pollution degree II, measuring cat. II power supply > 600 V (P), 300 V (D) input, output > 500 V (P), 250 V (D)
EMC	EN 61326-1, Industrial area
Seismic qualification	IEC/IEEE 60980-344 Edition 1.0, 2020, par. 6, 9
Mechanical resistance	EN 60068-2-6 ed. 2.2008

* PI - Primary insulation, DI - Double insulation

CONNECTION

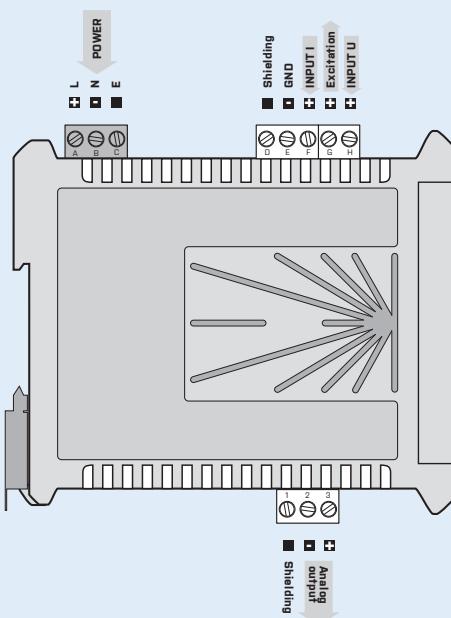

ORDER CODE

OMX 39DC

Power supply	10...30 V AC/DC 80...250 V AC/DC	0 1	
Measuring range*	voltage current	A B	
Excitation	no yes		0 1
Analog output	0...2 V 0...5 V 0...10 V 0...20 mA 4...20 mA ±10 V ±20 mA 0...5 mA		1 2 3 4 5 6 7 8

* Kindly specify the required input range in the order!

Basic configuration of the instrument is indicated in bold.