



## OMX 39RTD


- Input Pt 100/500/1 000
- Output 0...5 mA, 0...20 mA, 4...20 mA,  $\pm$ 20 mA  
0...2 V, 0...5 V, 0...10 V,  $\pm$ 10 V
- Galvanic separation 3.75 kVAC
- Power supply 10...30 V AC/DC; 80...250 V AC/DC

The OMX 39 model series are low-price and simple analog transmitters with mounting on a 35 mm wide DIN rail.

Type OMX 39RTD is a transmitter for galvanic separation of temperature resistance sensors Pt 100/500/1 000.

The transmitters have galvanic separation with isolation voltage of 600 V and thus they are suitable as primary isolation for majority of industrial applications.

### ISOLATED TRANSMITTER Pt > U/I

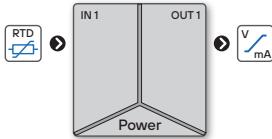

### OPERATION

The transmitter is designed for simple measurements without further control.

### CALIBRATION


By trimmers accessible from the face of the transmitter you may adjust the range of the output signal within the range of  $\pm$ 10 %.

## TECHNICAL DATA

INPUT		INSTRUMENT SPECIFICATION		POWER SUPPLY			
No. of inputs	1 The range is fixed	TC	50 ppm/ $^{\circ}$ C	Range	10...30 V AC/DC, $\pm 10\%$ , PF $\geq 0.4$ , $I_{SP} < 75$ A/1 ms, isolated		
RTD Range	Pt 100, 3 850 ppm/ $^{\circ}$ C Pt 500, 3 850 ppm/ $^{\circ}$ C Pt 1 000, 3 850 ppm/ $^{\circ}$ C	-50 $^{\circ}$ ...850 $^{\circ}$ C -50 $^{\circ}$ ...850 $^{\circ}$ C -50 $^{\circ}$ ...850 $^{\circ}$ C	Accuracy	$\pm 0.2\%$ of FS			
Overload	10x (t < 30 ms), 2x	Rate	continuous measurement	80...250 V AC/DC, $\pm 10\%$ , PF $\geq 0.4$ , $I_{SP} < 40$ A/1 ms, isolated			
Connection	2, 3- or 4-wire	Calibration	at 25 $^{\circ}$ C and 40 % r.h.	Protection by fuse inside the device			
				Consumption	< 2.4 W / 2.6 VA		
ANALOG OUTPUTS							
No. of outputs	1	Material	PA 66, incombustible UL 94 V-I, blue	MECHANIC PROPERTIES			
Type	isolated, fixed setting	Dimensions	22 x 98 x 113 mm (w x h x d)				
TC	25 ppm/ $^{\circ}$ C	Installation	on DIN rail, width 35 mm	OPERATING CONDITIONS			
Rate	response to change of value < 1 ms	Connection	connector terminal blocks, section < 2.5 mm <sup>2</sup>				
Ranges	0...2 / 5 / 10 V, $\pm 10$ V, resistive load $\geq 1$ k $\Omega$ 0...5 / 20 mA / 4...20 mA, $\pm 20$ mA compensation $< 600$ $\Omega$ /12 V	Stabilization period	within 5 minutes after switch-on				
Working temperat.							
-20 $^{\circ}$ ...60 $^{\circ}$ C							
Storage temperat.							
-20 $^{\circ}$ ...85 $^{\circ}$ C							
Working humidity							
< 95 % r.v., non condensing							
Protection							
IP20							
Construction							
safety class I							
El. safety							
EN 61010-1, A2							
Dielectric strength							
4 kVAC per 1 min test between supply and input							
4 kVAC per 1 min test between supply and analog output							
3.75 kVAC per 1 min test between input and analog output							
Insulation resist.*							
for pollution degree II, measuring cat. II							
power supply > 600 V (PI), 300 V (DI)							
input, output > 500 V (PI), 250 V (DI)							
EMC							
EN 61326-1, Industrial area							
Seismic qualification							
IEC/IEEE 60990-344 Edition 1.0, 2020, par. 6, 9							
Mechanical resistance							
EN 60068-2-6 ed. 2:2008							

\* PI - Primary insulation, DI - Double insulation

## CONNECTION

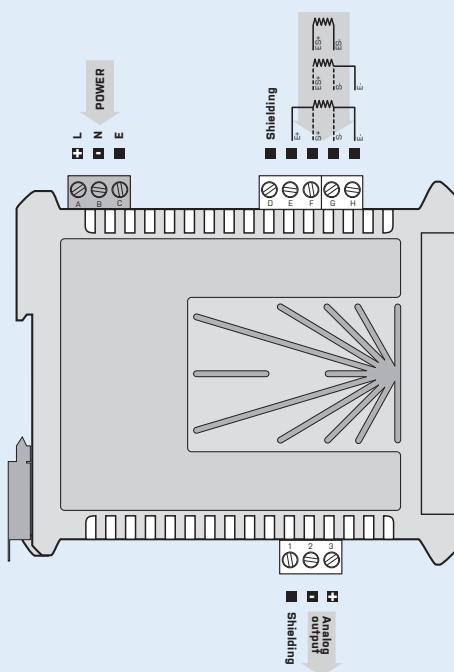

## ORDER CODE

### OMX 39RTD - [ ] [ ] [ ]

Power supply	10...30 V AC/DC	0	1	
	80...250 V AC/DC	1		
Measuring range*	Pt 100	A		
	Pt 500	B		
	Pt 1 000	C		
Connection	2-wire		1	
	3-wire		2	
	4-wire		3	
Analog output	0...2 V		1	
	0...5 V		2	
	0...10 V		3	
	0...20 mA		4	
	4...20 mA		5	
	$\pm 10$ V		6	
	$\pm 20$ mA		7	
	0...5 mA		8	

\* Please specify the required input temperature range in the order!

Basic configuration of the instrument is indicated in bold.