



OMP 38

The OMP 38 is a stabilized source for sensor power supply.

The source is in a plastic box with terminal board to DIN rail.


On the face of the transmitter there are LEDs, which indicate the operation status of the source.

- ADJUSTABLE STABILIZED SOURCE TO DIN RAIL
- OUTPUT 5/12/24 VDC, 5/15/24 VDC
- CURRENT AND HEAT PROTECTION
- POWER SUPPLY 80...250 V AC/DC

OMP 38
STABILIZED SOURCE

OPERATION

Switch for the setting of output voltage is located on the lower edge of the instrument

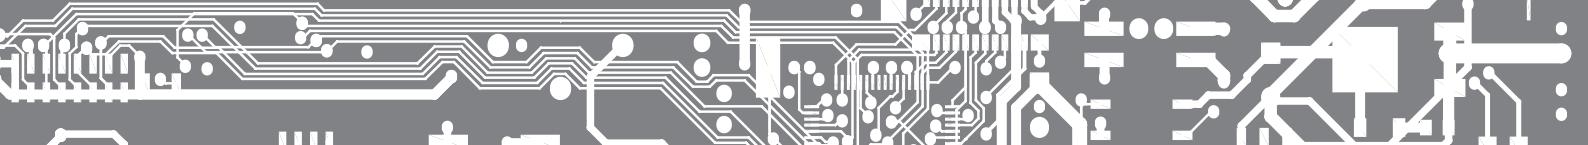

TECHNICAL DATA

OUTPUT

Output:
A - 5 VDC/450 mA; 12 VDC/300 mA; 24 VDC/150 mA
B - 6 VDC/450 mA; 15 VDC/240 mA; 24 VDC/150 mA
[adjustable by a switch on the box]

Tolerance: ± 0.25 V
Regulation: ± 0.1 V
Ripple: < 50 mVpp
Oufage span: > 200 ms
Efficiency: 63 %
Functions: active current restriction as per selected range, overstepping the restriction is signalled by red LED

POWER SUPPLY

Range: 80...250 V AC/DC, 50/60 Hz, $\pm 10\%$, max. 5.7 VA, PF ≥ 0.4
Input frequency: DC, 47...63 Hz
Input current: 100...45 mA
Starting current: < 20 A, < 1.5 ms
Protection: by a fuse inside the instrument [T630mA]

MECHANIC PROPERTIES


Material: PA 66, incombustible UL 94 V-I, blue
Dimensions: 113 x 98 x 22 mm
Installation: to DIN rail 35 mm wide

OPERATING CONDITIONS

Connection: connector terminal board, section < 2.5 mm²
Stabilization period: within 5 minutes after switch-on
Working temperature: -20°...60°C
Storage temperature: -20°...85°C
Cover: IP20
El. safety: EN 61010-1, A2
Dielectric strength: 4 kVAC after 1 min between supply and output
Insulation resistance: for pollution degree II, measuring cat. III.
Power supply, output > 300 V [Z], 150 V [D]
EMC: EN 61326-1
Seismic capacity: IEC 980: 1993, par. 6

Pi - Primary insulation, Di - Double insulation

CONNECTION

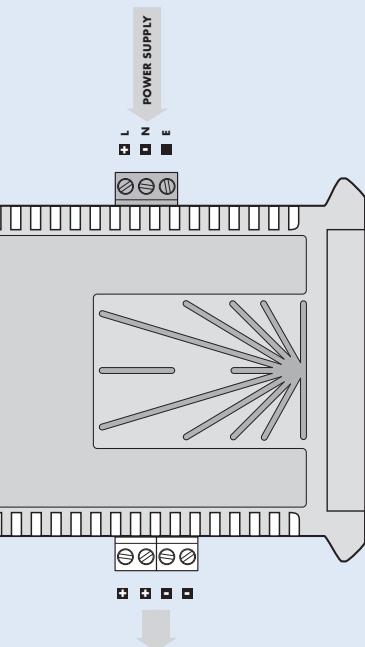

ORDER CODE

OMP 38

-

Output

5/12/24 VDC
5/15/24 VDC

A
B

Default execution is shown in bold