




UNIVERSAL BARGRAPH



OMB 500UNI

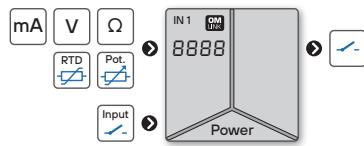

- Three-color bargraph - 50 LED
- Multifunction input (PM, OHM, RTD, DU)
- Digital filters, Linearization
- Size of DIN 144 x 48 mm
- Power supply 10...30 V AC/DC; 80...250 V AC/DC

Option

Comparators

The OMB 200/300/500UNI model series are simple bargraphs designed for maximum efficiency and user comfort while maintaining their favourable price. Type OMB 500UNI is a multifunction instrument with the option of configuration for 5 various input options, easily configurable in the instrument menu.

The instrument is based on a microcontroller with ADC which secures good accuracy, stability and easy operation of the instrument.

By selecting the insertion mode of the front plexiglass (reverse/face) you may choose the required scale printing for vertical or horizontal design of the instrument.

OPERATION

The instrument is set and controlled by five buttons located under the front panel. All programmable settings of the instrument may be performed in two adjusting modes.

LIGHT MENU contains solely items necessary for instrument setting.

PROFI MENU contains complete instrument setting, which is accessible only via OM Link.

Standard equipment is the OM Link interface, which together with the operation program enables modification and filing of all instrument settings as well as performing firmware updates (with OML cable).

All settings are stored in the EEPROM memory (settings hold even after the instrument is switched off).

OPTION

COMPARATORS are assigned to monitor one or two limit values with relay output. The limit has adjustable hysteresis within full range of the display and selectable delay of the switch-on within the range of 0...99 s. Reaching the preset limits is signalled by LED and simultaneously by the switch-on of the relevant relay.

STANDARD FUNCTIONS

PROGRAMMABLE PROJECTION

Selection: of input type and measuring range

Setting: manual, in menu optional projection on the display may be set for both limit values of the input signal

Projection: 50 LED

FUNCTIONS

Linearization: non-linear signal is converted by a 25-point linear interpolation

DIGITAL FILTERS

Exponential average: from 2...100 measurements

Rounding: setting the projection step for display

EXTERNAL CONTROL

Hold: display/instrument blocking

Lock: control keys blocking

TECHNICAL DATA

INPUT		
No. of inputs	1	The range is adjustable in the instrument menu
PM Range	0...20 mA	< 1.2 V Input 1
	4...20 mA	< 1.2 V Input 1
	0...2 V	182 kΩ Input 2
	0...5 V	182 kΩ Input 2
	0...10 V	182 kΩ Input 2
OHM Range	0...100 kΩ	
Connection	2-wire	
RTD Range	Pt 1 000, 3 850 ppm/°C	-50°...450°C
Connection	2-wire	
Ni Range	Ni 1 000, 5 000 ppm/°C	-50°...250°C
Connection	2-wire	
DU Sensor power supply	2.5 VDC/6 mA, potentiometer resistance > 500 Ω	

EXTERNAL INPUT

No. of inputs	1, on contact
Function	No function assigned Control keys blocking Measurement paused

PROJECTION

Bargraph display	50 LED
Bar color	red / green / orange
Brightness	
adjustable - in menu	
INSTRUMENT SPECIFICATION	
TC	50 ppm/°C
Accuracy	±1% of FS
Rate	0.5...50 measurement/s
Overload	10x (t < 30 ms), 2x
Compensation of conduct	< 30 Ω
RTD	
Digital filters	exponential average, rounding
Linearization	linear interpolation in 25 points setup only via OM Link
OM Link	company communication interface for operation, setting and update of instruments
Watch-dog	reset after 25 ms
Calibration	at 25°C and 40 % r.h.

RELAYS / OC OUTPUT

No. of outputs	up to 2
Type	digital, menu adjustable
Mode	HYSTER. active above set value
Function Relays	CLOSE is closed in active mode OPEN is open in active mode
Limits	-99999...99999
Hysteresis	0...99999
Delay	0...99.9 s
Outputs	1...2x relay with switch-on contact (Form A) (250 VAC/30 VDC, 3 A)* 1...2x open collector (30 VDC/100 mA)
Relays	1/8 HP 277 VAC, 1/10 HP 125 V, Pilot Duty D300

* values apply for resistance load

POWER SUPPLY


Range	10...30 V AC/DC, ±10%, PF ≥ 0.4, $I_{\text{st}} < 40 \text{ A} / 1 \text{ ms}$, isolated 80...250 V AC/DC, ±10%, PF ≥ 0.4, $I_{\text{st}} < 40 \text{ A} / 1 \text{ ms}$, isolated Protection by fuse inside the device
Consumption	< 3.5 W / 3.9 VA

MECHANIC PROPERTIES

Material	Noryl GFN2 SE1, incombustible UL 94 V-1, black
Dimensions	144 x 48 x 75 mm (w x h x d)
Panel cutout	138 x 43.5 mm (w x h)
OPERATING CONDITIONS	
Connection	connector terminal blocks, section < 1.5 / 2.5 mm ²
Stabilization period	within 5 minutes after switch-on
Working temperat.	-20°...60°C
Storage temperat.	-20°...85°C
Working humidity	< 95 % r.v., non condensing
Protection	IP40, front panel only
Construction	safety class I
El. safety	EN 61010-1, A2
Dielectric strength	2.5 kVAC for 1 min. between power supply and input 4 kVAC per 1 min test between input and relay output
Insulation resist.*	for pollution degree II, measuring cat. III power supply > 300 V (P), 150 V (D)
EMC	EN 61326-1:2021, Industrial area
RoHS	EN IEC 63000:2018
Seismic qualification	IEC/IEEE 60980-344 Edition 1.0, 2020, par. 6, 9
Mechanical resistance	EN 60068-2-6 ed. 2:2008

* PI - Primary insulation, DI - Double insulation

CONNECTION

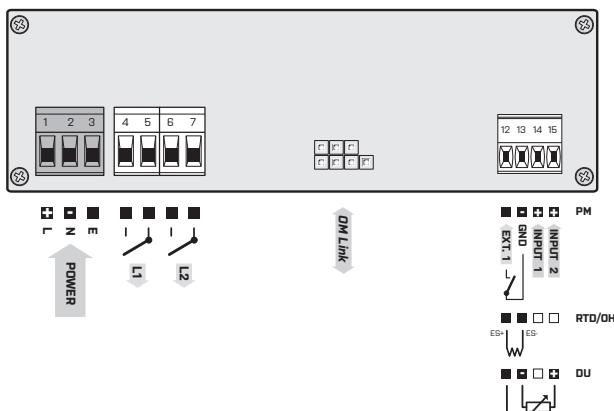

ORDER CODE

OMB 500UNI

- -

Power supply	10...30 V AC/DC 80...250 V AC/DC	0
Comparators	no	1
	1x relay (Form A)	0
	2x relay (Form A)	1
	1x open collector	2
	2x open collector	3
Specification	customized version, do not fill in	4

0
1
2
3
4

00

Basic configuration of the instrument is indicated in bold.