




DIGITAL ISOLATED TRASMITTERS

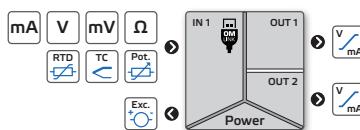

OMX 312UNI

- Multifunction input (DC, PM, RTD, T/C, DU)
- 2x Analog outputs, passive/active
- Quick configuration by DIP switch
- PC configurable via USB port
- Excitation 24 VDC
- Galvanic isolation 2.5 kVAC
- Simple instalation to DIN rail
- Power supply 10...30 VDC/ 24 VAC

The OMX 300 model series are digital DIN rail mounted trasmitterss housed in an enclosure only 17.5 mm wide.

The OMX 312UNI type is a galvanic isolated single-channel universal trasmitter / splitter. It can be configured for 10 different input variants. Setting of both the input and output ranges can be done conveniently by a DIP switch located on the side of the housing or from a PC via the OM Link SW.

You can also use this trasmitters as a splitter into 2 analogue outputs. This device is based on a 32-bit processor and 24-bit $\Delta\Sigma$ ADC, which guarantees high accuracy and excellent stability.

OPERATION

The device can be configured either by DIP switch located on the side of the housing or by PC using the OM Link SW. The same SW can be used to edit and archive all device settings, as well as to perform firmware updates and customer calibration.

Tech-in process can be performed for the measuring range currently selected using the front panel buttons.

All settings are stored in the EEPROM memory (preserved even after power-off)

STANDARD FUNCTIONS*

PROGRAMMABLE INPUT

Selection: of input type and measuring range

Standard setting: any input values can be assigned to Min and Max values of the analog output

Teach-in: any input values can be assigned to Min and Max values of the actual (unknown) input signal

Manual setting: the known Min and Max values of the input signal can be set manually and any analog output values can be assigned to each of them at the same time

ANALOG OUTPUT

Type: isolated, configurable with resolution of 10 000 parts, rate < 3.5 ms

Range: 0...10 V, 0...20 mA, 4...20 mA

EXCITATION

Range: 24 VDC/35 mA, isolated

COMPENSATION

Wiring (RTD, OHM): automatic (3- or 4-wire) or manual in menu (2-wire)

Probes (RTD): internal wiring (resistance of conductors in the measuring head)

CJC (T/C): manual or automatic (terminal temperature)

FUNCTIONS

Linearization: non-linear signal is converted by a 100-point linear interpolation

Tare: designed to reset display upon non-zero input signal

Fixed tare: fixed preset tare

Simulation: test mode in which range, value and duration of the step can be set

Math functions: polynomial, inverse polynomial, logarithm, exponential, power, root

DIGITAL FILTERS

Floating / Exponential / Arithmetic average: from 2 to 100 measurements

Rounding: setting a „shorter“ number for further signal processing



TECHNICAL DATA

INPUT		INPUT		
No. of inputs	Range	1	The range is selectable either by DIP switch or by OM Link free SW from PC	
DC	Range	±60 mV ±75 mV ±100 mV ±150 mV ±300 mV ±1000 mV ±20 V ±40 V ±100 mA	> 10 MΩ > 10 MΩ > 10 MΩ > 10 MΩ > 10 MΩ > 10 MΩ 1 MΩ 1 MΩ < 200 mV	Input Input Input Input Input Input Input Input Input
	Range	±5 mA ±20 mA 4...20 mA	< 200 mV < 200 mV < 200 mV	Input Input Input
	Range	±2 V ±5 V ±10 V	1 MΩ 1 MΩ 1 MΩ	Input Input Input
	Range	0...100 / 300 Ω 0...1 / 3 / 10 / 30 / 100 kΩ 0...300 kΩ (only 2- and 4-wire)		
	Connection	2-, 3- and 4-wire with broken cable/sensor detection		
	Range	Pt 100/500/1000, 3.850 ppm/°C Pt 100, 3.910 ppm/°C Pt 50, 3.910 ppm/°C Pt 100, 3.910 ppm/°C	50°...450° -50°...450° -200°...1100° -200°...450°	
	Connection	2-, 3- and 4-wire with broken cable/sensor detection		
NI	Range	NI 1000/10,000, 5,000 ppm/°C NI 10,000/100,000, 6,180 ppm/°C	-50°...250° -200°...250°	
	Connection	2-, 3- and 4-wire with broken cable/sensor detection		
Cu	Range	Cu 50/100, 2.460 ppm/°C Cu 50/100, 2.480 ppm/°C	-50°...200° -200°...200°	
	Connection	2-, 3- and 4-wire with broken cable/sensor detection		
NTC	Range	NTC 1 2k ₂₅ B ₂₅₀₅ = 3500 NTC 2 2k ₀ B ₂₅₀₅ = 3528 NTC 3 10k ₀ B ₂₅₀₅ = 3435 NTC 4 10k ₀ B ₂₅₀₅ = 3977 NTC 5 12k ₀ B ₂₅₀₅ = 3740 NTC 6 20k ₀ B ₂₅₀₅ = 4263	-40°...125° -40°...125° -40°...125° -40°...125° -40°...125° -40°...125°	
	Connection	2-, 3- and 4-wire with broken cable/sensor detection		
	Range	KTY 81/210	-55°...150°	
	Connection	2-, 3- and 4-wire with broken cable/sensor detection		
	Range			
	Range			
	Range			
PTC	Range			
	Connection			
T/C	Range			
	Connection			
CJC	Range			
	Connection			
DU	Sensor power supply	1.65 VDC/3 mA, potentiometer resistance > 500 Ω		
	Range			

INSTRUMENT SPECIFICATION

TC	50 ppm/°C	
Accuracy	$\pm 0.1\%$ of FS $\pm 0.3\%$ of FS $\pm 0.15\%$ of FS above accuracies apply for 20 meas./s	T/0 OHM -100k/300k
Rate	1...100 measurement/s	
Latency	< 13 ms	
Overload	10x (t < 30 ms), 2x	
Compensation of conduct	< 30 Ω	RTD
Measurement accuracy CJC	$\pm 1.5^\circ\text{C}$	T/0
Functions	Teach-in, offset, tare, math. functions, simulation	
Digital filters	exponential / floating / arithmetic average, rounding setup only via OM Link	
Math functions	polynomial / inverse polynomial / logarithm / exponential / power / root setup only via OM Link	
Linearization	linear interpolation in 100 points setup only via OM Link	
OM Link	company communication interface for operation, setting and update of instruments (microUSB)	
Watch-dog	reset after 500 ms	
Calibration	at 75°C and 40% rh	

ANALOG OUTPUTS


No. of outputs	2
Type	isolated, adjustable with resolution of max. 10 000 points, type and range are selectable in menu
TC	15 ppm/ $^{\circ}$ C
Accuracy	0.1% from FS
Rate	response to change of value < 3.5 ms
Ranges	0...10 / 0...0 V 0...20 / 0...0 mA 4...20 / 0...4 mA* active/passive with error indication (< 3.6 mA)*
Error indication	at range 4...20 mA (ER-4.20) A/D converter oversaturated - range exceeded by 20% (in both directions) - broken current loop 4...20 mA (< 2.6 mA)

POWER SUPPLY

Range	10...30 VDC / 24 AC, $\pm 10\%$, PF ≥ 0.4 , $I_{\text{sp}} < 40\text{ A}/1\text{ ms}$, isolated Protection by fuse inside the device
Consumption	< 25 W / 2.4 VA
MECHANIC PROPERTIES	
Material	PA 66, incombustible UL 94 V-1, blue
Dimensions	17.5 x 99 x 114.5 mm (w x h x d)
Installation	on DIN rail, width 35 mm
OPERATING CONDITIONS	
Connection	connector terminal blocks, section $< 2.5\text{ mm}^2$
Stabilization period	within 5 minutes after switch-on
Working temperat.	-20...60°C
Storage temperat.	-20...85°C
Working humidity	< 95% r.v., non condensing
Protection	IP20
Construction	safety class I
El. safety	EN 61010-1, A2
Dielectric strength	2.5 kVAC per 1 min test between supply and input 2.5 kVAC per 1 min test between supply and analog output 2.5 kVAC per 1 min test between analog outputs
Insulation resist.*	for pollution degree II, measuring cat. III power supply > 300 V (P), 255 (D) input, output > 300 V (P)
EMC	EN 61326-1-2021, Industrial area
RoHS	EN IEC 63000:2018
Seismic qualification	IEC/IEEE 60980-344 Edition 1.0, 2020, par. 6, 9
Mechanical resistance	EN 60068-2-6 ed. 2.2008

* PI - Primary insulation, DI - Double insulation

CONNECTION

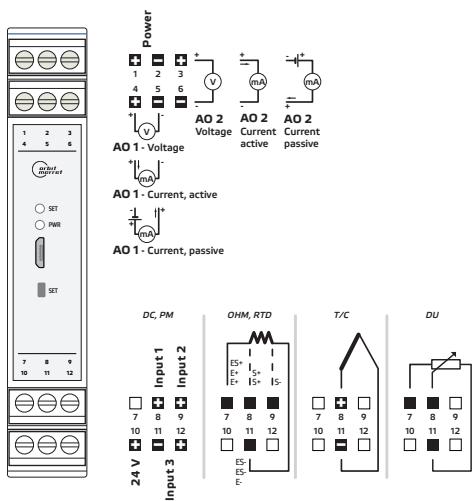

ORDER CODE

OMX 312UNI

-

Specification customized version, do not fill in 00