




AC/DC V-A METER

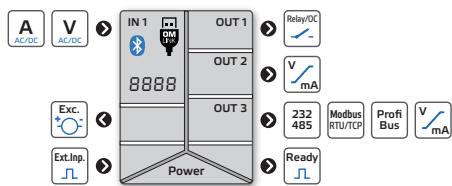

CONTROLS

The device is controlled and set by either five touch keys located on the front panel or via a PC. For easier navigation of the device menu, the keys are backlit in different colors and provide haptic feedback when pressed.

Initial set up of the device is easily done using our Setup Wizard, which guides you step by step through the basic settings required to make the device operational.

There are two menu levels, USER and PROFI. The PROFI menu is password protected and it allows access to all menu items. If necessary, a narrowed down USER menu can be created using only selected items. These can be any items you select. USER menu is not password protected.

OM 403UNI can also be configured from a PC using our free OM Link software via USB-C or Bluetooth. This SW also lets you archive all settings, transfer them from one device to another, perform firmware updates and even device calibration.

All settings are stored in the EEPROM memory, so they are preserved even after the device is turned off.

OPTIONS

COMPARATORS (Relays or Open Collectors) are designed to monitor two, three, four or six limit values. The user can select various output modes and functions to match specific operational requirements. Reaching one or more set limit values is indicated by signaling LEDs and by switching on/off the relevant output.

DATA COMMUNICATION OUTPUTS can transfer measured values to other display devices or directly to control systems with speed and accuracy. Galvanic isolated RS232 and RS485 interfaces are available, supporting ASCII, Modbus and PROFINET protocols.

ANALOG OUTPUTS are ideal for applications where further evaluation or processing of measured values in external devices is required. The galvanic isolated analog output is universal with the option of choosing the type and range - voltage or current.

RECORDING OF MEASURED VALUES is ideal for applications that require measured values to be analyzed retrospectively, or simply archived. Recording takes place in real time (RTC). Recording parameters (start and stop times as well as frequency) are user defined. In case of short-term events, recording can be continuous with writing speed equal to sampling rate. Data is stored either in the device's internal memory or on a USB-C flash drive.

OM 403PWR



- 3-color LED main display, auxiliary display and bargraph
- Voltage, Current, Active / Reactive / Apparent power
- Input I 60 / 150 / 300 mV, 1 / 5 / 10 A
- Input U-DC 0...200 / 350 / 600 / 1000 V
- Input U-AC 0...150 / 250 / 450 / 700 V
- Touch keys with haptic feedback and RGB backlighting
- Teach-in, Digital filters, Tare, Mat. function, Linearization
- DIN size 96 x 48 mm
- Power supply 10...30 V AC/DC or 80...250 V AC/DC

Option

Comparators ● Data communication ● Analog output ● Data recording

The OM 403 series are 6-digit panel instruments designed for fast and easy setup, as well as accuracy and reliability.

Type OM 403PWR is a universal AC/DC V-A meter. The setup and operation of the device are user-friendly, despite its versatility, by incorporating two displays, touch keys with color navigation and haptic feedback, as well as our Setup Wizard integrated into the meter.

The device is based on a 32-bit processor and a multi-channel 24-bit $\Delta\Sigma$ ADC, which ensure high accuracy, stability and easy operation.

STANDARD FUNCTIONS

PROGRAMMABLE PROJECTION

Selection: user-selectable AC/DC measurement type and measuring range.

Standard: for both endpoints of the input range, any value can be set on the display, e.g. input 0...5 A > 0...100.0

Measuring modes: voltage (V_{RMS}), current (A_{RMS}), active power (W), reactive power (Q), apparent power (S), frequency (Hz) and power factor ($\cos \phi$)

Overall projection: -99999...99999

FUNCTIONS

Linearization: non-linear signal can be converted by up to 100-point linear interpol.

Tare: zeroing the display when the input signal is not zero

Offset: fixed offset of the initial value

Min/max value: registration of min./max. values reached during the measurement

Peak value: the display projects only the highest or the lowest measured value

Mathematical functions: polynomial, 1/x, logarithm, exponential, power, square root

Simulation: the device simulates its function without a connected input signal

Log: recording of events and error messages with a date and time stamp

DIGITAL FILTERS

Floating / Exponential / Arithmetic average: from 2 to 100 measurements

Rounding: setting the display step for the display

EXTERNAL CONTROL

Hold: stop measurement

Lock: locking out the buttons

Tare: activation and zeroing of tare

Reset Min/Max: reset the min/max value

Hold Min/Max: start the measurement to evaluate the Min/Max value

Sample: start of one-time measurement

Data recording: storage of measured values in the device memory

Opening of a relay: enabling a relay to disengage while in Permanent mode (safety relay)

TECHNICAL DATA

INPUT		PROJECTION	
No. of inputs	2 The range is adjustable in the instrument menu	Primary display	.99999999999, three-color alphanumeric LED, 6 digits 11-segment, red / green / orange, digit height 14 mm
DC	Range I 0...60 mV > 1 MΩ 0...100 mV > 1 MΩ 0...300 mV > 1 MΩ 0...0.25 A < 200 mV 0.05 A < 200 mV 0.1 A < 200 mV 0.25 A < 200 mV 0.5 A < 200 mV 0...10 A < 200 mV ±200 V 1 MΩ ±350 V 1 MΩ ±600 V 1 MΩ ±1000 V 1 MΩ	Input 3 Input 3 Input 3 Input 3 Input 3 Input 3 Input 4 Input 4 Input 4 Input 4 Input 2 Input 2 Input 1 Input 1	Input 3 Input 3 Input 3 Input 3 Input 3 Input 3 Input 4 Input 4 Input 4 Input 4 Input 2 Input 2 Input 1 Input 1
	Range U 0...60 mV > 1 MΩ 0...100 mV > 1 MΩ 0...300 mV > 1 MΩ 0...0.25 A < 200 mV 0.05 A < 200 mV 0.1 A < 200 mV 0.25 A < 200 mV 0.5 A < 200 mV 0...10 A < 200 mV ±200 V 1 MΩ ±350 V 1 MΩ ±600 V 1 MΩ ±1000 V 1 MΩ	Input 3 Input 3 Input 3 Input 3 Input 3 Input 3 Input 4 Input 4 Input 4 Input 4 Input 2 Input 2 Input 1 Input 1	
	Measured quantities Voltage [V] Current [A] Power P [W]		
	AC Range I 0...60 mV > 1 MΩ 0...100 mV > 1 MΩ 0...300 mV > 1 MΩ 0...0.25 A < 200 mV 0.05 A < 200 mV 0.1 A < 200 mV 0.25 A < 200 mV 0.5 A < 200 mV 0...10 A < 200 mV 0...150 V 1 MΩ 0...250 V 1 MΩ 0...450 V 1 MΩ 0...700 V 1 MΩ	Input 3 Input 3 Input 3 Input 3 Input 3 Input 3 Input 4 Input 4 Input 4 Input 4 Input 2 Input 2 Input 1 Input 1	
	Input frequency Measured quantities Voltage [V _{AC}] Current [I _{AC}] Active power P [W] Apparent power S [VA] Reactive power Q [VA _R] Power factor $\cos \phi$ Frequency [Hz] DC component [V]		

CONTROL INPUTS AND OUTPUT

No. of inputs	3, isolated, on contact, PNP/NPN, < 30 V
Function	No function assigned Activation of Tare Reset of Tare Reset of Min./Max. and PEAK values Tare activation (<1s) + Zero tare (>1s) Activation of Tech-In for Offset Open relay/OC (Type LATCH) Controlling of cumulative measurement Min/Max and PEAK value Measurement paused Take a one-off measurement Value of minimum/maximum/MAX-MIN/Average* Device buttons blocked Data recording Delete memory Show value of all Channels and Brutto
No. of output	1, isolated, open collector 30 V/100 mA
Function - Ready	Active when the device reports no error messages

*The value is calculated from the period starting with the previous external input activation

PROJECTION	
Primary display	.99999999999, three-color alphanumeric LED, 6 digits 11-segment, red / green / orange, digit height 14 mm
Secondary display	.99999999999, single-color alphanumeric LED, 6 digits, 11-segment, green, digit height 7 mm
Info display	0...99, single-color alphanumeric LED, 2 digits, 11-segment, orange, digit height 7 mm
Bar graph	17 single-color LEDs, horizontal column
Signal LEDs	20 single-color LEDs indicating device functions and status (red, yellow, orange)
Decimal point	adjustable, floating or exponential display
Description	displayed on the secondary display or on the last two characters of the primary display
Brightness	adjustable or automatic

INSTRUMENT SPECIFICATION	
TC	50 ppm/°C
Accuracy	$\pm 0.05\%$ of FS 0.1% of FS Accuracy specified at 1 meas/s, display 9999
Rate	0.5 ... measurement/s
Overload	10x (t < 30 ms), 2x
Control	5 touch keys backlit by LEDs and haptic feedback
Functions	Teach-in, tare, preset tare, peak value, min/max value, math functions, delayed start, simulation, error and event logging
Timer	time and daily operational restrictions of the device, functions, and its peripherals (data recording, relays, ...)
Digital filters	exponential / floating / arithmetic average, rounding
Math functions	polynomial / inverse polynomial / logarithm / exponential / power / root
Linearization	linear interpolation in 100 points setup only via OM Link
Measured data logging	< 100 000 records Long-term time-date-measured value Single-shot high-speed logging < 5 meas/s
OM Link	company communication interface for operation, setting and update of instruments (BT, USB-C)
Time	accuracy 1 minute/year
Watch-dog	reset after 500 ms
Calibration	at 25°C and 40 % r.h.

RELAYS / OC OUTPUT	
No. of outputs	up to 6
Type	digital, menu adjustable
Mode	RISE active above set value DROP active below set value WINDOW active in the set window / band BATCH active in set periods
Function Relays/OC	SW. ON is closed in active mode SW. OFF is open in active mode PULSE switches on once in active mode LATCH in active mode the output is switched permanently, disconnection is blocked (IEC EN 61495) - disconnection is performed by ext. input
Limits	.99999999999
Hysteresis	0...99999
Delay / Time	0...999 s
Outputs	2 - 4x relay with switching contact (Form C) (250 VAC/50 VDC, 3 A)* 3 - 6x relay with switch-on contact (Form A) (250 VAC/30 VDC, 3 A)* 3 - 6x open collector (30 VDC/100 mA)
Relays	1/8 HP 277 VAC, 1/10 HP 125 V, Pilot Duty D300

* values apply for resistance load

ANALOG OUTPUTS	
No. of outputs	1 or 2
Type	isolated, adjustable with 16-bit DAC, output type and range is selectable
TC	15 ppm/°C
Accuracy	$\pm 0.02\%$ of FS $\pm 0.03\%$ of FS $\pm 0.06\%$ of FS 0...5 V 0...2 V / 0...5 mA
Rate	response to change of value < 160 µs
Ranges	Range Error indication 0...2 V -2.2 V resistive load > 1 kΩ 0...5 V -5.5 V resistive load > 1 kΩ 0...10 V -11.0 V resistive load > 1 kΩ ±10 V -11.0 V resistive load > 1 kΩ 0...5 mA -5.5 mA comp. < 600 Ω/12 V 0...20 mA -22.0 mA comp. < 600 Ω/12 V 4...20 mA -3.2 mA comp. < 600 Ω/12 V
Insulation resist.*	for pollution degree II, measuring cat. III power supply, input > 670 V (P), 300 (D) input, output, excitation > 300 V (P), 150 V (D)
EMC	EN 6126-1:2021, Industrial area EN IEC 62032:2021, Nuclear facilities
RoHS	EN IEC 63000:2018
Seismic capacity	EN IEC/IEEE 60980-344 ed. 1.0 2020, par. 6, 9
Mechanical resistance	EN 60068-2-6 ed. 2.2008

* PI - Primary insulation, DI - Double insulation

DATA COMMUNICATION	
No. of outputs	1
Protocol	ASCII, Modbus RTU, Modbus TCP/IP, PROFINET
Rate	600 ... 230 400 Baud 10 Mbit/s, 100 Mbit/s (Modbus TCP/IP, PROFINET)
Data format	Format 8bits + parity + stop bit Parity none / even / odd Stop bit 1 / 1.5 / 2
Addressing	1...99 instruments (ASCII) 1...247 instruments (Modbus)
Line termination	internal dioprem 120 Ω DIP switch on the last device

CONNECTION

ORDER CODE	
OM 403PWR	- <input type="text"/> - <input type="text"/> - <input type="text"/> -
Power supply	10...30 V AC/DC 80...250 V AC/DC
Current input	internal shunt external shunt (60 / 150 / 300 mV)
Comparators	no 2x relay (Form C) 4x relays (Form C) 3x relays (Form A) 6x relays (Form A) 3x open collectors 6x open collectors
Outputs	no Analog output RS 232 RS 485 Modbus TCP/IP PROFINET Analog output + RS 232 Analog output + RS 485 2x Analog outputs
Recording of measured values	no yes
Specification	customized version, do not fill in

Basic configuration of the instrument is indicated in bold.

