



OM 503T



- 3-color LED main display, auxiliary display and bargraph
- Range: 1...2 / 2...4 / 4...8 / 8...16 mV/V
- Touch keys with haptic feedback and RGB backlighting
- Weighing function, Accuracy 0.025 %
- Teach-in, Digital filters, Tare, Mat. function, Linearization
- DIN size 96 x 48 mm
- Power supply 10...30 V AC/DC or 80...250 V AC/DC

Option

Comparators ● Data communication ● Analog output ● Data recording


The OM 503 series consists of 6-digit panel meters that are based on a 32-bit processor and a fast 24-bit $\Delta\Sigma$ ADC converter, ensuring high measurement accuracy and immediate response. These meters have been designed with a focus on top performance, reliability, and user comfort, making them an ideal choice for demanding measurement applications.

For maximum convenience, the instruments feature a dual-line display, capacitive touch buttons with color navigation and haptic feedback, as well as an integrated setup guide that facilitates intuitive operation.

Their modular design allows easy customization of functions, while the focus on serviceability ensures long lifespan and low maintenance costs.

The OM 503T model is a display unit for load cells, equipped with advanced weighing functions. It has been designed to ensure accurate and reliable measurements and to enable easy processing of signals from load cell sensors.

DISPLAY FOR STRAIN GAUGES

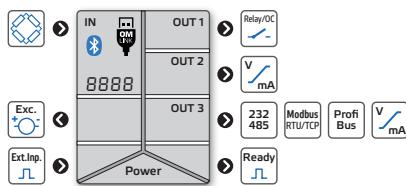

CONTROLS

The device is controlled and set by either five touch keys located on the front panel or via a PC. For easier navigation of the device menu, the keys are backlit in different colors and provide haptic feedback when pressed.

Initial set up of the device is easily done using our Setup Wizard, which guides you step by step through the basic settings required to make the device operational.

There are two menu levels, USER and PROFI. The PROFI menu is password protected and it allows access to all menu items. If necessary, a narrowed down USER menu can be created using only selected items. These can be any items you select. USER menu is not password protected.

OM 403UNI can also be configured from a PC using our free OM Link software via USB-C or Bluetooth. This SW also lets you archive all settings, transfer them from one device to another, perform firmware updates and even device calibration.

All settings are stored in the EEPROM memory, so they are preserved even after the device is turned off.

OPTIONS

COMPARATORS (Relays or Open Collectors) are designed to monitor two, three, four or six limit values. The user can select various output modes and functions to match specific operational requirements. Reaching one or more set limit values is indicated by signaling LEDs and by switching on/off the relevant output.

DATA COMMUNICATION OUTPUTS can transfer measured values to other display devices or directly to control systems with speed and accuracy. Galvanic isolated RS232 and RS485 interfaces are available, supporting ASCII, Modbus and PROFINET protocols.

ANALOG OUTPUTS are ideal for applications where further evaluation or processing of measured values in external devices is required. The galvanic isolated analog output is universal with the option of choosing the type and range - voltage or current.

RECORDING OF MEASURED VALUES is ideal for applications that require measured values to be analyzed retrospectively, or simply archived. Recording takes place in real time (RTC). Recording parameters (start and stop times as well as frequency) are user defined. In case of short-term events, recording can be continuous with writing speed equal to sampling rate. Data is stored either in the device's internal memory or on a USB-C flash drive.

STANDARD FUNCTIONS

PROGRAMMABLE PROJECTION

Standard: manual entry of sensitivity and maximum measuring range of the sensor, e.g., 2.0574 mV/V and 100 N

Teach-In: with this function, it is possible to perform automatic calibration using a reference load for both extreme values, e.g., input 0.02...21.01 mV > 0...459.8 kg

Manual: user can manually set the two endpoint values of the input signal and assign to them any display values, e.g. input 0.05...20.48 mV > 0...250.0 kg

Weighing function: signalization of stabilized equilibrium, zero stabilization, automatic zero monitoring, defined number of segments on the scale

Selection of segment size: 0.001.../0.1/0.2/0.1/2/5/10/20/50/100 (Mode - WEIGHT)

Overall projection: -99999...99999

FUNCTIONS

Linearization: non-linear signal can be converted by up to 100-point linear interpol.

Tare: zeroing the display when the input signal is not zero

Offset: fixed offset of the initial value

Min/max value: registration of min./max. values reached during the measurement

Peak value: the display projects only the highest or the lowest measured value

Mathematical functions: polynomial, 1/x, logarithm, exponential, power, square root

Simulation: the device simulates its function without a connected input signal

Log: recording of events and error messages with a date and time stamp

DIGITAL FILTERS

Floating / Exponential / Arithmetic average: from 2 to 100 measurements

Rounding: setting the display step for the display

EXTERNAL CONTROL

Hold: stop measurement

Lock: locking out the buttons

Tare: activation and zeroing of tare

Reset Min/Max: reset the min/max value

Hold Min/Max: start the measurement to evaluate the Min/Max value

Sample: start of one-time measurement

Data recording: storage of measured values in the device memory

Opening of a relay: enabling a relay to disengage while in Permanent mode (safety relay)

TECHNICAL DATA

INPUT

No. of inputs	1 The range is adjustable in the instrument menu
T Range	1...2 mV/V 2...4 mV/V 4...8 mV/V 8...16 mV/V
Sensor power supply	10 VDC, load \geq 80 Ω 5 V on request
Connection	4- or 6-wire connection settings via DIP switch
Sensor power supply	0.001/0.002/0.005/ 0.01/0.02/0.05/ 0.1/0.2/0.5/ 1/2/5/10/20/50/100
Zero tracking	the zero is automatically maintained within 4 % of the measuring range, provided that the correction does not exceed 0.5 scale division/second.
Automatic scale zeroing	if a negative value remains steady on the display for more than 5 seconds (with the Tare function active), automatic taring occurs.

CONTROL INPUTS AND OUTPUT

No. of inputs	3, isolated, on contact, PNP/NPN, < 30 V
Function	No function assigned Activation of Tare Reset of Tare Reset of Min/Max and PEAK values Tare activation (<1s) + Zero tare (>1s) Activation of Tech-In for Offset Open relay/OC (Type LATCH) Controlling of cumulative measurement Min/Max and PEAK value Measurement paused Take a one-off measurement Value of minimum/maximum/MAX-MIN/Average* Device buttons blocked Data recording Delete memory Show value of all Channels and Brutto
No. of output	1, isolated, open collector 30 V/100 mA
Function - Ready	Active when the device reports no error messages

*The value is calculated from the period starting with the previous external input activation

PROJECTION

Primary display	.99999...99999, three-color alphanumeric LED, 6 digits 11-segment, red / green / orange, digit height 14 mm
Secondary display	.99999...99999, single-color alphanumeric LED, 6 digits, 11-segment, green, digit height 7 mm
Info display	0...99, single-color alphanumeric LED, 2 digits, 11-segment, orange, digit height 7 mm
Bar graph	17 single-color LEDs, horizontal column
Signal LEDs	20 single-color LEDs indicating device functions and status (red, yellow, orange)
Decimal point	adjustable, floating or exponential display
Description	displayed on the secondary display or on the last two characters of the primary display
Brightness	adjustable or automatic

INSTRUMENT SPECIFICATION

TC	25 ppm/ $^{\circ}$ C
Accuracy	$\pm 0.025\%$ of FS Accuracy specified at 50 meas./s, display 99999
Rate	1...1.200 measurement/s
IIR filter	mains hum suppression (50/60 Hz) greater than 45 dB (>10 ⁴ reduction of interference amplitude) For measurement speeds >100 measurements/s
Overload	10x (t < 30 ms), 2x
Control	5 touch keys backlit by LEDs and haptic feedback
Functions	Teach-in, tare, preset tare, peak value, min/max value, math, functions, delayed start, simulation, error and event logging
Timer	time and daily operational restrictions of the device, function, and its peripherals (data recording, relays, ...)
Digital filters	exponential / floating / arithmetic average, rounding
Math functions	polynomial / inverse polynomial / logarithm / exponential / power / root
Linearization	linear interpolation in 100 points setup only via OM Link
Measured data logging	< 100 000 records Long-term: time-date-measured value Single-shot: high-speed logging > 400 meas./s
OM Link	company communication interface for operation, setting and update of instruments (BT, USB-C)
Time	accuracy < 1 minute/year
Watch-dog	reset after 500 ms
Calibration	at 25 $^{\circ}$ C and 40% r.h.

RELAYS / OC OUTPUT

No. of outputs	up to 6
Type	digital, menu adjustable
Mode	RISE active above set value DROP active below set value WINDOW active in the set window / band BATCH active in set periods
Function Relays/OC	SW. ON is closed in active mode SW. OFF is open in active mode PULSE switches on once in active mode LATCH active in mode the output is switched permanently, disconnection is blocked (IEC EN 61495) - disconnection is performed by ext. input
Limits	.99999...99999

Hysteresis	0...99999
Delay / Time	0...999 s
Outputs	2 - 4x relay with switching contact (Form C) (250 VAC/50 VDC, 3 A)* 3 - 6x relay with switch-on contact (Form A) (250 VAC/30 VDC, 3 A)* 3 - 6x open collector (30 VDC/100 mA)
Relays	1/8 HP 277 VAC, 1/10 HP 125 V, Pilot Duty D300

* values apply for resistance load

ANALOG OUTPUTS

No. of outputs	1 or 2
Type	isolated, adjustable with 16-bit DAC, output type and range is selectable
TC	15 ppm/ $^{\circ}$ C
Accuracy	$\pm 0.02\%$ of FS $\pm 0.03\%$ of FS $\pm 0.06\%$ of FS 0...5 V 0...2 V / 0...0.5 mA
Rate	response to change of value < 160 μ s

Ranges Range Error indication

0...2 V ~2.2 V resistive load > 1 k Ω

0...5 V ~5.5 V resistive load > 1 k Ω

0...10 V ~11.0 V resistive load > 1 k Ω

± 10 V ~11.0 V resistive load > 1 k Ω

0...5 mA ~5.5 mA comp. < 600 D/12 V

0...20 mA ~22.0 mA comp. < 600 D/12 V

4...20 mA ~3.2 mA comp. < 600 D/12 V

Indication of broken current loop

* PI - Primary insulation, DI - Double insulation

Insulation resist. * for pollution degree II, measuring cat. III power supply, input > 670 V (PI), 300 V (DI) input, output, excitation > 300 V (PI), 150 V (DI)

EMC EN 61326-1:2021, Industrial area

EN IEC 62032:2021, Nuclear facilities

RoHS EN IEC 63000:2018

Seismic capacity EN IEC/IEEE 60980-344 ed. 1.0:2020, par. 6, 9

Mechanical resistance EN 60068-2-6 ed. 2:2008

EN 61010-1, A2

Dielectric strength 4 kVAC per 1 min test between supply and input

4 kVAC per 1 min test between supply and data/ analog output

4 kVAC per 1 min test between input and relay output

2.5 kVAC per 1 min test between input and data/ analog output

EN 61010-2-022, Industrial area

EN IEC 62032:2021, Nuclear facilities

EN 61326-1:2021, Industrial area

EN IEC 62032:2021, Nuclear facilities

EN 61010-1, A2

Dielectric strength 4 kVAC per 1 min test between supply and input

4 kVAC per 1 min test between supply and data/ analog output

4 kVAC per 1 min test between input and relay output

2.5 kVAC per 1 min test between input and data/ analog output

EN 61010-2-022, Industrial area

EN IEC 62032:2021, Nuclear facilities

EN 61326-1:2021, Industrial area

EN IEC 62032:2021, Nuclear facilities

EN 61010-1, A2

Dielectric strength 4 kVAC per 1 min test between supply and input

4 kVAC per 1 min test between supply and data/ analog output

4 kVAC per 1 min test between input and relay output

2.5 kVAC per 1 min test between input and data/ analog output

EN 61010-2-022, Industrial area

EN IEC 62032:2021, Nuclear facilities

EN 61326-1:2021, Industrial area

EN IEC 62032:2021, Nuclear facilities

EN 61010-1, A2

Dielectric strength 4 kVAC per 1 min test between supply and input

4 kVAC per 1 min test between supply and data/ analog output

4 kVAC per 1 min test between input and relay output

2.5 kVAC per 1 min test between input and data/ analog output

EN 61010-2-022, Industrial area

EN IEC 62032:2021, Nuclear facilities

EN 61326-1:2021, Industrial area

EN IEC 62032:2021, Nuclear facilities

EN 61010-1, A2

Dielectric strength 4 kVAC per 1 min test between supply and input

4 kVAC per 1 min test between supply and data/ analog output

4 kVAC per 1 min test between input and relay output

2.5 kVAC per 1 min test between input and data/ analog output

EN 61010-2-022, Industrial area

EN IEC 62032:2021, Nuclear facilities

EN 61326-1:2021, Industrial area

EN IEC 62032:2021, Nuclear facilities

EN 61010-1, A2

Dielectric strength 4 kVAC per 1 min test between supply and input

4 kVAC per 1 min test between supply and data/ analog output

4 kVAC per 1 min test between input and relay output

2.5 kVAC per 1 min test between input and data/ analog output

EN 61010-2-022, Industrial area

EN IEC 62032:2021, Nuclear facilities

EN 61326-1:2021, Industrial area

EN IEC 62032:2021, Nuclear facilities

EN 61010-1, A2

Dielectric strength 4 kVAC per 1 min test between supply and input

4 kVAC per 1 min test between supply and data/ analog output

4 kVAC per 1 min test between input and relay output

2.5 kVAC per 1 min test between input and data/ analog output

EN 61010-2-022, Industrial area

EN IEC 62032:2021, Nuclear facilities

EN 61326-1:2021, Industrial area

EN IEC 62032:2021, Nuclear facilities

EN 61010-1, A2

Dielectric strength 4 kVAC per 1 min test between supply and input

4 kVAC per 1 min test between supply and data/ analog output

4 kVAC per 1 min test between input and relay output

2.5 kVAC per 1 min test between input and data/ analog output

EN 61010-2-022, Industrial area

EN IEC 62032:2021, Nuclear facilities

EN 61326-1:2021, Industrial area

EN IEC 62032:2021, Nuclear facilities

EN 61010-1, A2

Dielectric strength 4 kVAC per 1 min test between supply and input

4 kVAC per 1 min test between supply and data/ analog output

4 kVAC per 1 min test between input and relay output

2.5 kVAC per 1 min test between input and data/ analog output

EN 61010-2-022, Industrial area

EN IEC 62032:2021, Nuclear facilities

EN 61326-1:2021, Industrial area

EN IEC 62032:2021, Nuclear facilities

EN 61010-1, A2

Dielectric strength 4 kVAC per 1 min test between supply and input

4 kVAC per 1 min test between supply and data/ analog output

4 kVAC per 1 min test between input and relay output

2.5 kVAC per 1 min test between input and data/ analog output

EN 61010-2-022, Industrial area

EN IEC 62032:2021, Nuclear facilities

EN 61326-1:2021, Industrial area

EN IEC 62032:2021, Nuclear facilities

EN 61010-1, A2

Dielectric strength 4 kVAC per 1 min test between supply and input

4 kVAC per 1 min test between supply and data/ analog output

4 kVAC per 1 min test between input and relay output

2.5 kVAC per 1 min test between input and data/ analog output

EN 61010-2-022, Industrial area

EN IEC 62032:2021, Nuclear facilities

EN 61326-1:2021, Industrial area

EN IEC 62032:2021, Nuclear facilities

EN 61010-1, A2

Dielectric strength 4 kVAC per 1 min test between supply and input

4 kVAC per 1 min test between supply and data/ analog output

4 kVAC per 1 min test between input and relay output

2.5 kVAC per 1 min test between input and data/ analog output

EN 61010-2-022, Industrial area

EN IEC 62032:2021, Nuclear facilities

EN 61326-1:2021, Industrial area

EN IEC 62032:2021, Nuclear facilities

EN 61010-1, A2

Dielectric strength 4 kVAC per 1 min test between supply and input

4 kVAC per 1 min test between supply and data/ analog output

4 kVAC per 1 min test between input and relay output

2.5 kVAC per 1 min test between input and data/ analog output

EN 61010-2-022, Industrial area

EN IEC 62032:2021, Nuclear facilities

EN 61326-1:2021, Industrial area

EN IEC 62032:2021, Nuclear facilities

EN 61010-1, A2

Dielectric strength 4 kVAC per 1 min test between supply and input

4 kVAC per 1 min test between supply and data/ analog output

4 kVAC per 1 min test between input and relay output