




## OMX 211PM

- Input 0...2/5/10 V  
0...5/20 mA, 4...20 mA, passive/active
- Analog output, passive/active
- Quick configuration by DIP switch
- PC configurable via USB port
- Galvanic isolation 2.5 kVAC
- Simple installation to DIN rail
- Power supply 10...30VDC, 24 VAC



### PROGRAMMABLE ISOLATED TRANSMITTERS

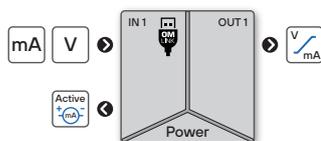

The OMX 200 model series are digital DIN rail mounted transmitters housed in an enclosure only 12.5 mm wide.

The OMX 211PM type is a simple single-channel isolator with a convenient setting of the input and output ranges either using a DIP switch on the side of the housing or the free OM Link SW from a PC.

This device is based on a 32-bit processor and 24-bit  $\Delta\Sigma$  ADC, which guarantees high accuracy and excellent stability.

### OPERATION

The device can be configured either by DIP switch located on the side of the housing or by PC using the OM Link SW. The same SW can be used to edit and archive all device settings, as well as to perform firmware updates and customer calibration.

Tech-in process can be performed for the measuring range currently selected using the front panel buttons.

All settings are stored in the EEPROM memory (preserved even after power-off)

### STANDARD FUNCTIONS\*

#### PROGRAMMABLE INPUT

**Measuring range:** adjustable in menu

**Standard setting:** any input values can be assigned to Min and Max values of the analog output

**Teach-in:** any input values can be assigned to Min and Max values of the actual (unknown) input signal

**Manual setting:** the known Min and Max values of the input signal can be set manually and any analog output values can be assigned to each of them at the same time

#### ANALOG OUTPUT

**Type:** isolated, configurable with resolution of 10 000 parts, rate < 3.5 ms

**Range:** 0...10 V, 0...20 mA, 4...20 mA

#### FUNCTIONS

**Linearization:** non-linear signal is converted by a 50-point linear interpolation

**Tare:** designed to reset display upon non-zero input signal

**Fixed tare:** fixed preset tare

**Simulation:** test mode in which range, value and duration of the step can be set

**Math functions:** polynomial, inverse polynomial, logarithm, exponential, power, root

#### DIGITAL FILTERS

**Floating average:** from 2...30 measurements

**Exponential average:** from 2...100 measurements

**Arithmetic average:** from 2...100 measurements

**Rounding:** setting a „shorter“ number for further signal processing

\* this setting is only possible via the OM Link SW

## TECHNICAL DATA

### INPUT

No. of inputs	1 The range is selectable either by DIP switch or by OM Link free SW from PC	
PM Range	0...5 mA	< 200 mV
	0...20 mA	< 200 mV
	4...20 mA	< 200 mV
	±2 V	1 MΩ
	±5 V	1 MΩ
	±10 V	1 MΩ

### INSTRUMENT SPECIFICATION

TC	50 ppm/°C
Accuracy	±0.1% of FS + 1 digit <i>above accuracies apply for 20 meas./s</i>
Rate	1...100 measurement/s
Latency	< 13 ms
Overload	10x (t < 30 ms), 2x
Functions	Teach-in, offset, tare, preset tare, min/max value, math. functions, simulation
Digital filters	exponential / floating / arithmetic average, rounding
Math functions	polynomial / inverse polynomial / logarithm / exponential / power / root
Linearization	linear interpolation in 100 points <i>setup only via OM Link</i>
OM Link	company communication interface for operation, setting and update of instruments (microUSB)
Watch-dog	reset after 500 ms
Calibration	at 25°C and 40 % rh.

### ANALOG OUTPUTS

No. of outputs	1
Type	isolated, adjustable with resolution of max. 10 000 points, type and range are selectable in menu
TC	15 ppm/°C
Non-linearity	0.1% from FS
Rate	response to change of value < 3.5 ms
Ranges	0...10/10...0 V, resistive load ≥ 1 kΩ 0...20/20...0 mA 4...20/20...4 mA, compensation < 600 Ω/12 V

### EXCITATION

Fixed	24 VDC / 35 mA, isolated <i>only for 4...20 mA input</i>
-------	---

### POWER SUPPLY

Range	10...30 VDC / 24 AC, ±10 %, PF ≥ 0.4, $I_{typ} < 40 A / 1 ms$ , isolated <i>Protection by fuse inside the device</i>
Consumption	< 1.8 W / 1.7 VA

### MECHANIC PROPERTIES


Material	PA 66, incombustible UL 94 V-1, blue
Dimensions	125 x 99 x 114.5 mm (w x h x d)
Installation	on DIN rail, width 35 mm

### OPERATING CONDITIONS

Connection	connector terminal blocks, section < 2.5 mm <sup>2</sup>
Stabilization period	within 5 minutes after switch-on
Working temperat.	-20°...60°C
Storage temperat.	-20°...85°C
Working humidity	< 95 % r.v., non condensing
Protection	IP20
Construction	safety class I
El. safety	EN 61010-1, A2
Dielectric strength	2.5 kVAC per 1 min test between supply and input 2.5 kVAC per 1 min test between supply and analog output
Insulation resist.*	for pollution degree II, measuring cat. III power supply > 300 V (PI), 255 (DI) input, output > 300 V (PI)
EMC	EN 61326-1, Industrial area
Seismic qualification	IEC/IEEE 60980-344 Edition 1.0, 2020, par. 6, 9
Mechanical resistance	EN 60068-2-6 ed. 2:2008

\* PI - Primary insulation, DI - Double insulation

## CONNECTION

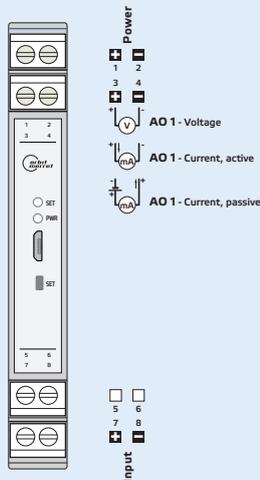

## ORDER CODE

**OMX 211PM**

- □

Specification

customized version, do not fill in

00